

PORTSEA 1 LIGHT LARGE EXTERIOR WALL BRACKET

SKU# 239355, 239356, 239357

Rated Voltage 220-240V~ 50Hz.

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- This luminaire is covered by a 5 years warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. e.g. AS/NZS 3000 Electrical Installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating. This luminaire must be used with LED lamps only.
- This luminaire is rated IP65, this must be maintained during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - The mounting point must be able to support 2 times the weight of the luminaire.
 - This luminaire is protected against water penetration to IP65 standards, which is against low-pressure jets of water from all practicable directions. This must be maintained during wiring and installation.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.

Installation Directions

WARNING: Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. (Fig. A)
2. Remove the mounting bracket from the luminaire by loosen the screws on the sides. (Fig. B1)
3. Use the mounting bracket as a template to mark the screw hole positions on the wall. (Fig. B2)
4. Install the mounting bracket on the wall by using appropriately sized mounting screws and anchors. (Fig. B3)
Ensure the screws and anchors used are suitable for the mounting surface and surrounding environment.

NOTE: It is recommended that a non-corrosive bead of silicone be applied before installation onto the wall ensuring that no water can run down into the cabling.

5. Connect the mains supply wires to the terminal block. Ensure the wires are secure and no bare wires are exposed. (Fig. C1)

Mains Supply Wire

Earth – Yellow/Green 

Neutral – Blue or Black

Live – Brown or Red

Luminaire Wire / Terminal Block

Yellow/Green or 

Blue or N


Brown or L

NOTE: This luminaire is a Class I product and must be earthed during wiring and installation.

6. Install the luminaire back onto the mounting bracket and secure by tightening the screws on the sides. (Fig. C2)
7. Install a globe (not included) into the lamp holder. (Fig. D1)

NOTE: This luminaire must be used with LED lamps only. Do not exceed the maximum wattage rating.

8. Install the washer and glass shade onto the luminaire. Check the seal has not moved and forms a tight seal between the glass shade and the luminaire (Fig. D2)
9. Make any final adjustments to the luminaire and check that all parts are secured tightly before turning the power on.

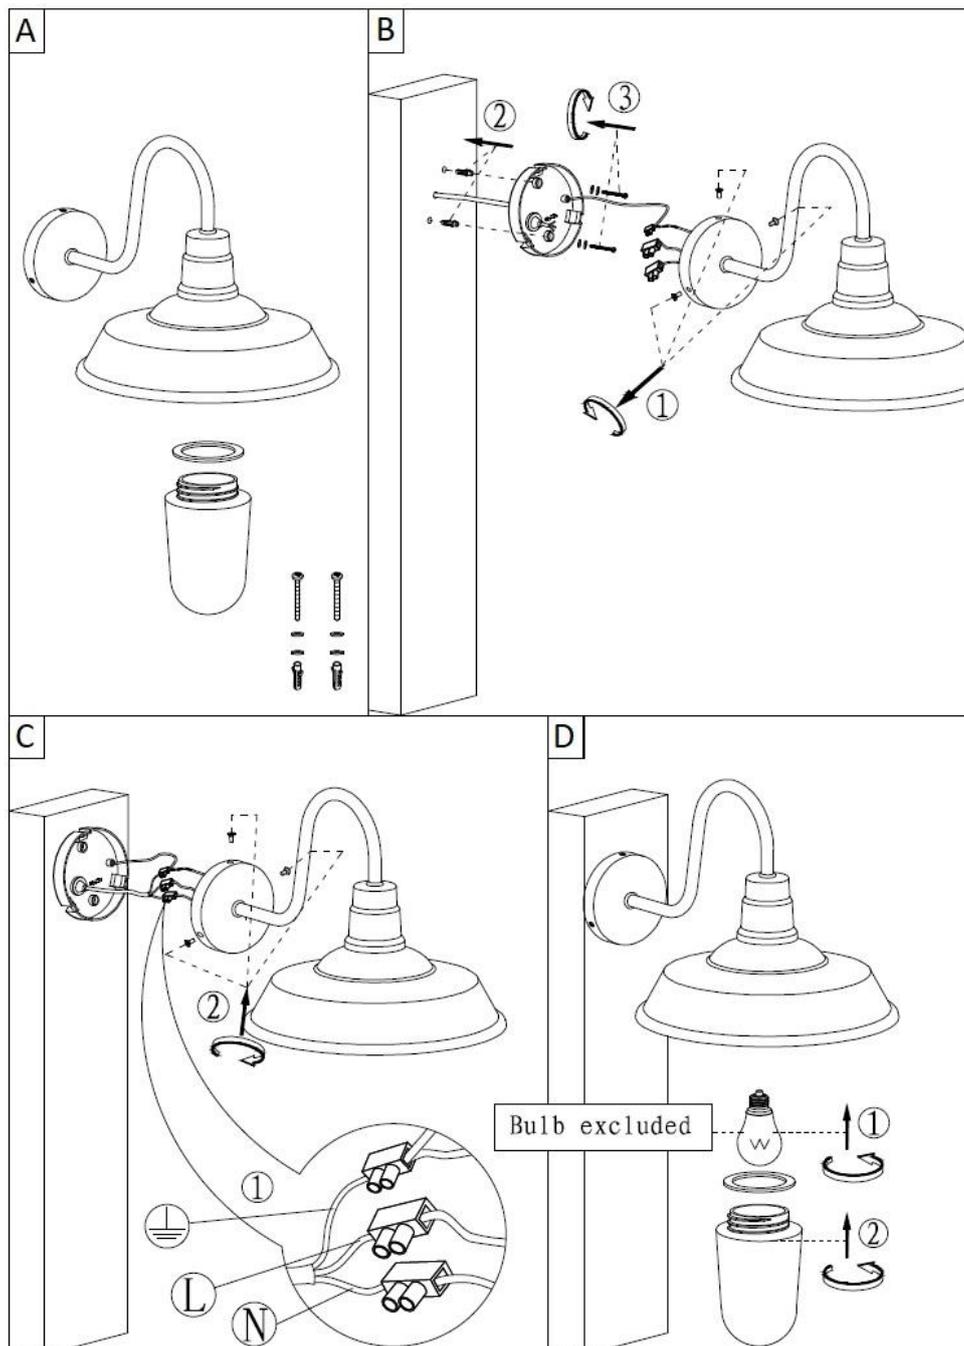

Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- The luminaire must not be used if the shade has been cracked or damaged. Replace the shade before using the luminaire again.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the product in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	239355	239356	239357
Colour	Matte White	Matte Black	Bronze Finish
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	15W Max.(LED Lamp Only)		
Lamp Holder	ES / E27		
IP Rating	IP65		
Weight	1.8kg		
Dimensions	H:410mm W:340mm E:500mm		

