

Southampton DIY - Under Eave Light Fitting

SKU# 230886, 239554

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before using the product. Please keep instructions for future reference.

Warranty

- This light fitting is covered by a 12 month warranty.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.

Installation requirements

- This light fitting is classified – **DIY** (Do- It- Yourself) and does not require any electrical connection or disconnection. The service of a licensed electrician is **NOT** required.
- The assistance of a technical person with the correct tools may be required to complete the install.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation;
 - This product has an IP23/IP33 rating, and is suitable for indoor or outdoor use. **When the product is installed outdoor, it MUST BE installed under cover.**

NOTE: The product is rated IP23 when the bottom shade (H) is NOT installed.

The product is rated IP33 when the bottom shade (H) is installed.

- Ensure the fitting is not installed next to any air vents and is not in any moist or damp areas.
- The location must have a B22 lamp batten holder pre-installed, as this lighting fitting is design to be use with a B22 lamp batten holder. If you don't have a B22 lamp batten holder, please contact your license electrician.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF.

Installation directions

Read the installation guide below, and the installation diagram to complete the installation:

1. Switch OFF power to the lamp batten holder that this DIY light fitting.
2. Remove all packaging material from the product.
3. Remove the globe from the batten holder (E).
4. Remove the lamp batten holder skirt (C).
5. Place the Frame/Body over the batten holder (A).
6. Using the batten holder skirt as the securing mechanism to hold the Frame/Body in place. Ensure the batten holder skirt is secure and that it has taken up at least 2-3 thread while securing the Frame/Body of the light fitting.
7. Replace the globe (Not included).
8. Install the bottom shade (H) onto the luminaire by tightening the four screws (O) according to the need of the IP requirement.


NOTE: The product is rated IP23 when the bottom shade (H) is NOT installed.

The product is rated IP33 when the bottom shade (H) is installed.

9. Turn On the power to the lamp batten holder, and then switch ON the globe.
10. The installation is now complete. Return power to the lamp batten holder.

SKU#239554

SKU#230886

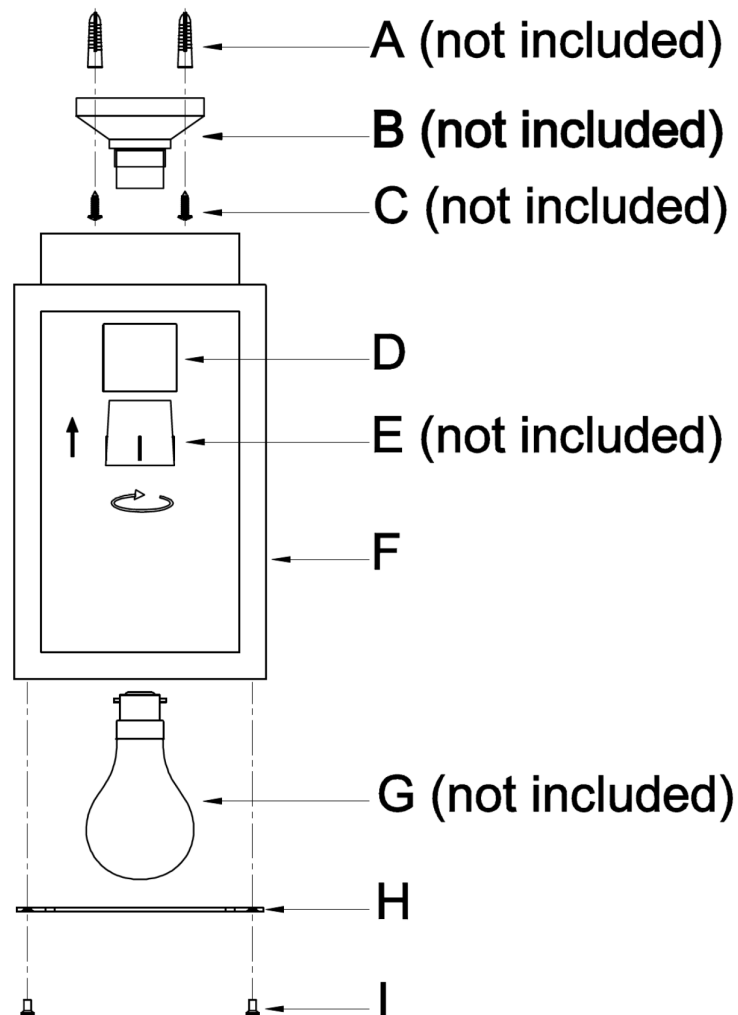

Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or adjustment to the fitting.
- Do not touch the globe with bare hands. Use a clean cloth, gloves or a tissue.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

Specifications

SKU #	230886	239554
Colour	Black	White
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	45W Max.	
Batten Holder type	BC	
IP rating	IP23 IP33 when the bottom shade (N) is installed	
Weight	1.5 Kg	
Dimensions	H:250mm W:140mm E:140mm	