

## CAPRI LED TABLE LAMP

SKU# 269412, 269413

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

### Warranty





- This portable luminaire is covered by a 3-year warranty valid for in-store replacement or refund only.
- The warranty period starts from the date of purchase. Please retain the proof of purchase.
- Warranty will be void if there is any damage due to improper usage or modification to the portable luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

### Installation Requirements

- Select a suitable location for this portable luminaire:
  - Ensure it is on a flat and stable surface.
  - This portable luminaire is suitable for indoor use only.
  - Do not place flammable material near or over the portable luminaire.
  - Ensure the portable luminaire is not installed in direct line of an air vent/system.
  - This luminaire is rated against water penetration to IP54 standards, which is water splashing from any direction.  
**NOTE: The plug-in charger is rated IP20 and has no protection against water penetration.**  
**NOTE: Charging cable and plug-in charger must not be in use for the luminaire to be rated IP54.**  
**NOTE: Plastic cover must be secure over the micro USB charging port for the luminaire to be rated IP54.**
- If the portable luminaire is placed in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure no components are missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Do not plug into the mains power socket outlet before or during assembly. Only do so after the portable luminaire is fully assembled and is ready to use for the first time.

### Installation Directions

1. Remove all packaging material from the product and accessories. (Fig. 1)
2. Pull back the plastic cover from the micro USB charging port. (Fig. 2)
3. Insert the micro USB end of the cable into the portable luminaire. (Fig. 3)
4. Insert the plug-in charger into the mains power socket outlet and ensure it is fully plugged in. (Fig. 3)
5. Turn on the mains power socket outlet.
6. Press the touch switch (short press) to turn the portable luminaire ON/OFF. (Fig. 4)  
Press and hold the touch switch (long press) to adjust the brightness of the portable luminaire.

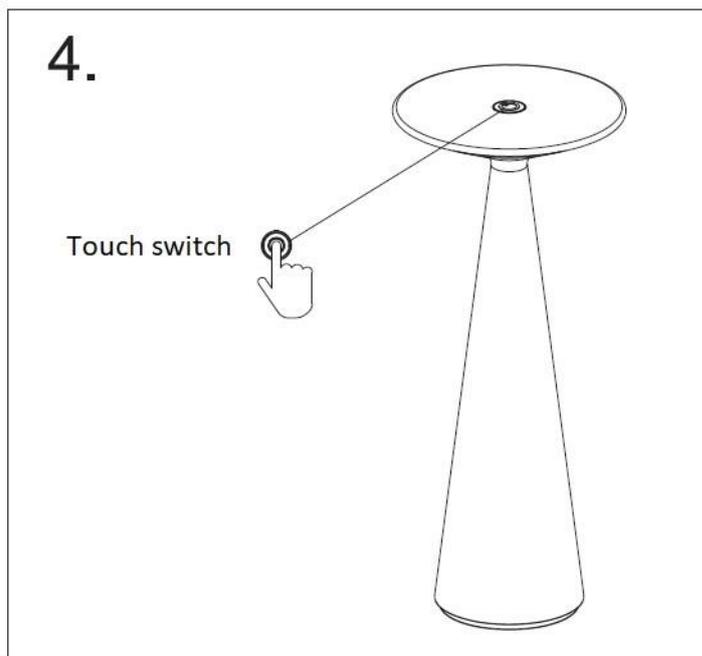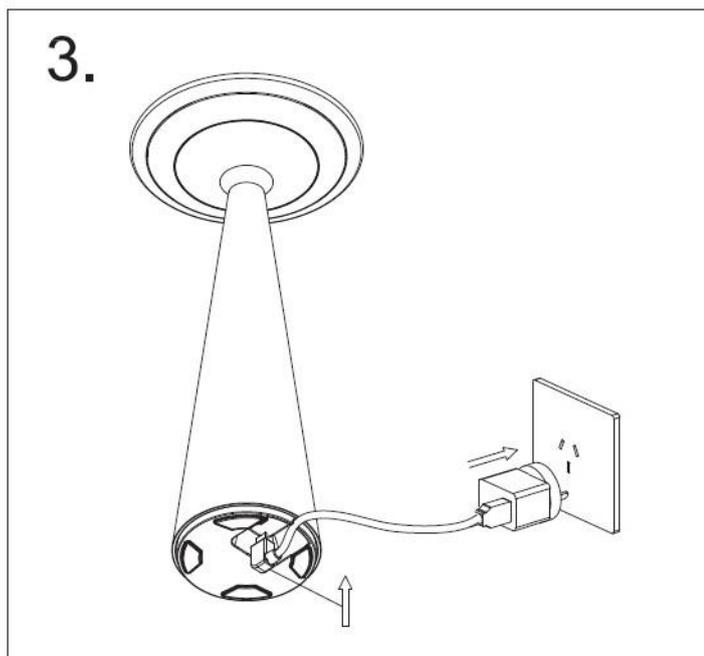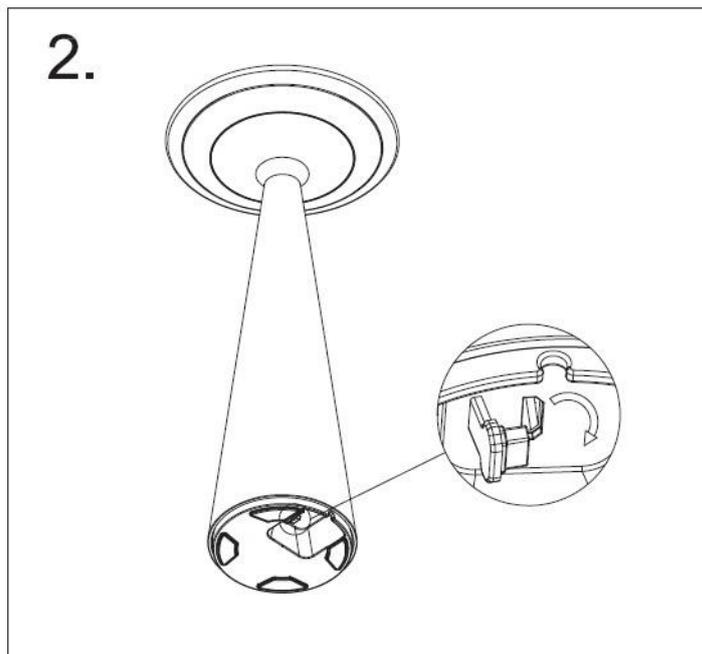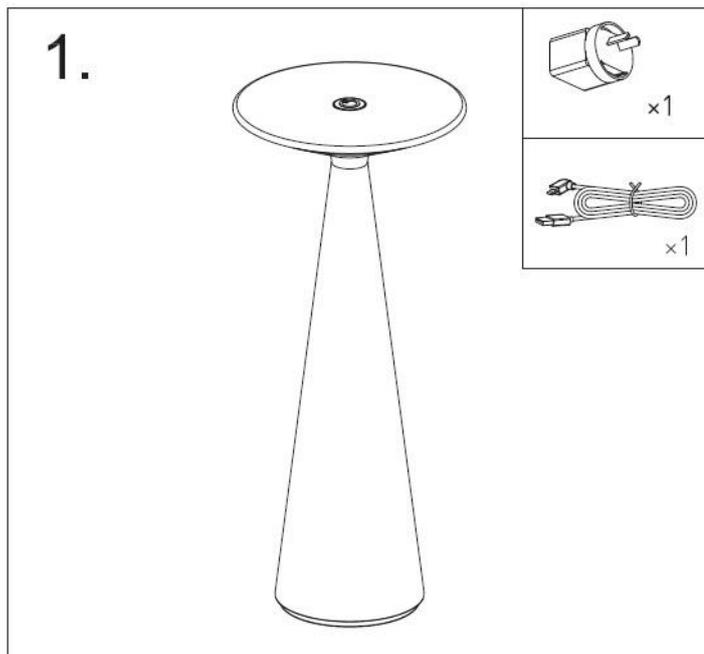

## Safety Tips

- Always ensure the power is OFF and the portable luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the portable luminaire.
- Young children should be supervised to ensure that they do not play with the portable luminaire.
- The luminaire must not be used if the protective shield has been cracked or damaged.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the product in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the luminaire.
- The luminaire includes a built-in Li-ion battery, which is non-replaceable. The luminaire will need to be discarded once the battery reaches its end of life. Contact your local council to dispose of equipment with batteries safely.

## Specifications

SKU #	269412	269413
Colour	Matte Black	Matte White
Rated Voltage	5V DC 1A	
Rated Wattage	5.5W Max. (including the driver)	
LED Specs	130 lumens, Warm White 3000K, CRI>80	
Battery	Built-in rechargeable Li-ion battery, Non-replaceable, 2200mAh	
IP Rating	IP54* for the portable lamp, IP20 for plug-in charger	
Weight	0.8kg	
Dimensions	H:295mm D:125mm	

**\*NOTE: The plug-in charger is rated IP20 and has no protection against water penetration.**

**Charging cable and plug-in charger must not be in use for the luminaire to be rated IP54.**

**The plastic cover must be secure over the micro USB charging port for the luminaire to be rated IP54.**