

OSBORNE DAY NIGHT SLEEP PLUS LED FLOOR LAMP

SKU# 269780, 269781

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep the instructions for future reference.

Warranty

- This portable luminaire is covered by a 3-year warranty valid for in-store replacement or refund only.
- The warranty period starts from the date of purchase. Please retain the proof of purchase.
- The warranty will be void, if there is any damage due to improper usage or modification to the portable luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void the warranty.

Installation Requirements

- Select a suitable location for this portable luminaire:
 - Ensure it is on a flat and stable surface.
 - This portable luminaire is suitable for indoor use only.
 - Do not place flammable material near or over the portable luminaire.
 - Ensure the portable luminaire is not installed in direct line of an air vent/system.
 - If the portable luminaire is placed in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Only use the supplied plug in LED driver with this luminaire.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any luminaire which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Do not plug into the mains power socket outlet before or during assembly. Only do so after the luminaire is fully assembled and is ready to use for the first time.

Installation Directions

1. Remove all packaging material from the portable luminaire.
2. Install the top section of the luminaire (B) onto the middle section (E) and secure by tightening the grub screw with the allen key (C) provided. Install the middle section (E) of the luminaire into the bottom section (F).


NOTE: Take care not to cross-thread or twist and damage the cord during assembly. Pull the cord out from the back of the bottom section (F) as you assemble. Check the cord after every three turns when installing the top part of the luminaire (B) onto the middle section (E) and bottom section (F). Relieve any twist in the cord by turning it anti-clockwise.

3. Attach the lamp base (G) onto bottom section of the luminaire (F), and secure by installing the star washer, spring washer and nut with the spanner (H) provided.
4. Adjust the luminaire head (A) to your desired angle.

NOTE: Do not adjust luminaire head (A) more than the 330° as this may damage the joint and internal wires.

5. To adjust the height of the luminaire, loosen the grub screw and the telescopic tube clamp lock (D). Pull the cord out or push the cord in at the cord entry point at the back of the bottom section (F) during the height adjustment. After adjusting to your desired height, tighten the telescopic tube clamp lock (D) and the grub screw to ensure it is secure.

6. Plug the cord connectors (I) from the LED driver and luminaire together.
7. Insert the LED driver (J) into the mains socket outlet and ensure it is fully plugged in.
8. Portable luminaire touch switch operation:
 - Press the touch switch on the back of the luminaire head (A) to turn ON the portable luminaire.
 - Short press the touch switch (1 sec intervals) to change the colour temperature.
The colour temperature sequence is: 2700K (night light) → 3000K → 4000K → 5000K
 - NOTE:** If the touch switch is pressed too quickly (less than 1 sec), the colour switching function may not work.
 - Short press the touch switch three times (within 1 sec), to enter 2700K night light mode directly.
 - Long press and hold the touch switch to dim the luminaire. **NOTE:** The 2700K (night light) cannot be dimmed.
 - Short press the touch switch twice (within 1 sec) to turn OFF the portable luminaire.
 - When the portable luminaire has been turned off for more than 7 seconds, it will memorise the brightness and colour temperature setting for when you turn on the portable luminaire again.

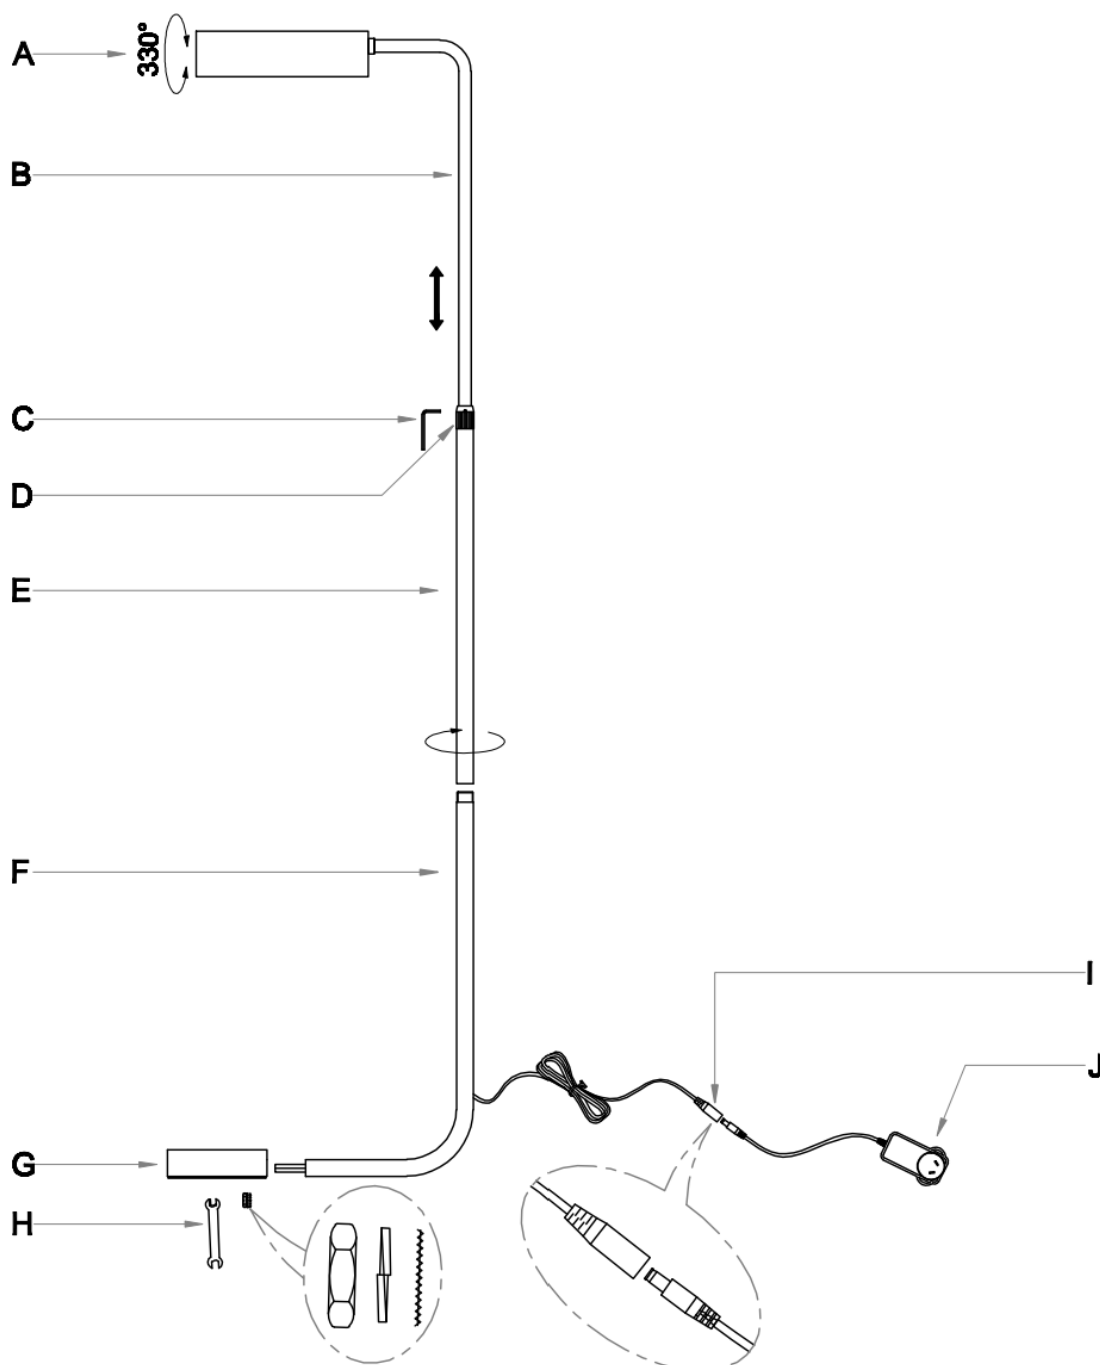

NOTE: Do not adjust luminaire head (A) more than the 330° as this may damage the joint and internal wires.

Safety Tips

- Always ensure the power is OFF and the portable luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the portable luminaire.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Young children should be supervised to ensure that they do not play with the portable luminaire.
- Handle the luminaire and shade with care to avoid any damage or breakage.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the product in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	269780	269781
Colour	Textured Black	Aged Bronze Finish
Rated Voltage	220~240V~ 50Hz	
Rated Wattage	35W Max	
Rated Lumens	2700K – 150 lumens (Night light) 3000K – 1850 lumens 4000K – 2000 lumens 5000K – 2000 lumens	
LED Specs	CRI≥90, Colour shifting and dimmable via the built-in touch switch.	
Weight	5.7kg	
Dimensions	H:1160mm-1520mm L:365mm W:255mm	