

## CORIAN TABLE LAMP

SKU# 269385, 269386, 269387

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep the instructions for future reference.

### Warranty

- This luminaire is covered by a 12 month warranty from the date of purchase. Please retain proof of purchase.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

### Installation Requirements

- Select a suitable location for this luminaire:
  - This product is suitable for indoor use only.
  - Do not place flammable material near or over the luminaire.
  - Ensure the luminaire is not installed in direct line of an air vent/system.
  - If the luminaire is placed in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.

- Do not exceed the maximum wattage rating.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling.

If parts are missing, return the complete product to the place of purchase for inspection or replacement.

- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Do not plug into the mains power socket outlet before or during assembly. Only do so after the portable lamp is fully assembled with the globe installed and is ready to use for the first time.


### Installation Directions

1. Remove all packaging material from the product and fabric lamp shade (A).
2. Remove the lamp holder ring (C) from the lamp holder (A).
3. Install the fabric lamp shade (A) onto the lamp holder (D) and secure using the lamp holder ring (C).
4. Install a globe (B - not included) into the lamp holder. Do not exceed the maximum rated wattage.

**NOTE: This fitting is suitable with dimmable globes only. It is NOT suitable to use with 3 step dimmable globes.**

5. Select a suitable location for the luminaire. See the installation requirements above.
6. Insert the plug (G) into the mains power socket outlet and ensure it is fully plugged in.
7. Turn power on at the mains power socket outlet.
8. This luminaire has a 3 step dimming function, operating in the following order:
  - Touch the luminaire body (H) once, and the luminaire will turn on and light up at 30% brightness.
  - Touch the luminaire body (H) a second time, and the luminaire will light up at 60% brightness.
  - Touch the luminaire body (H) a third time, and the luminaire will light up at 100% brightness.
  - Touch the luminaire body (H) a fourth time, and the luminaire will turn off.

9. You can charge your device via the USB outputs on the base of the luminaire. The rated output of the USB output is 5V DC, 2.1A. Refer to the instruction manual of your device for the required charge ratings.

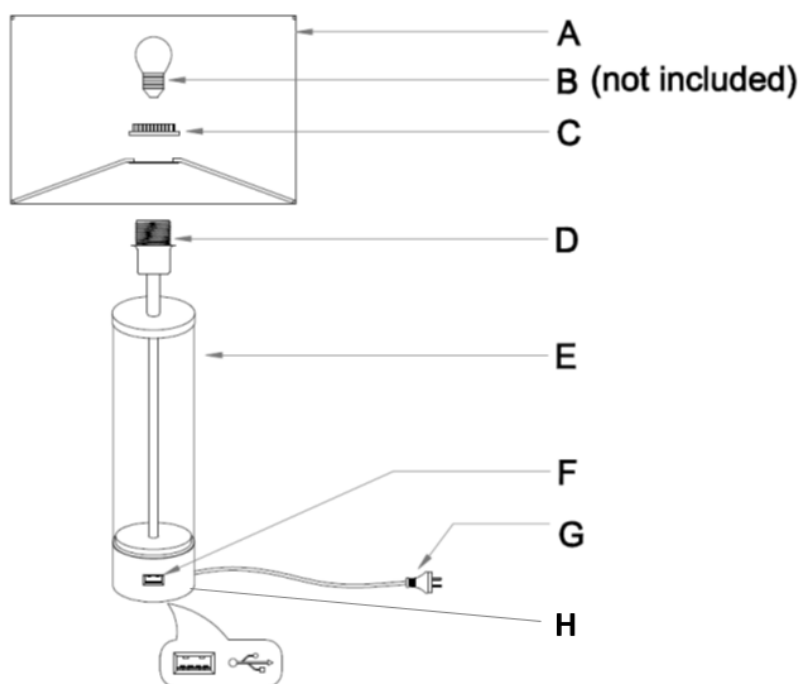

## Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cable or cord is damaged, the luminaire shall be destroyed.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Young children should be supervised to ensure that they do not play with the portable lamp.
- Handle the luminaire and/or shade with care to avoid any damage or breakage.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the product in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

## Specifications

SKU #	269385	269386	269387
Colour	Chrome / Clear	Black	Antique Bronze / Smoke
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	45W Max. (3-step dimming)		
Lamp Holder	ES / E27		
USB Charger	5V DC, 2.1A		
Weight	2.3kg		
Dimensions	H:620mm Dia:360mm		