

## CHRYSLER 2 LIGHT BAR PENDANT

SKU# 039204, 039205, 039206, 039207

Rated Voltage 220-240V~ 50Hz

To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 12-month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician, the warranty will be void.
- Please retain the proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with instructions in this manual may increase the risk of damage or injury and will void the warranty.

### Installation requirements

- This luminaire must be assembled and installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.  
e.g. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
  - This luminaire is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the luminaire.
  - When installing a luminaire in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

**WARNING:** Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

**NOTE:** Due to the size/weight/wiring of the luminaire, two people will be required to lift it up during the installation process.


- 1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the luminaire on its side on a smooth non scratch surface.
- 2. Decide on the suspension length of your luminaire by installing the different sections of suspension rods (O, P, Q, R) onto the luminaire (T). Feed the luminaire cables (S) through as you assemble to remove any slack.

**NOTE:** Take care not to cross-thread or twist and damage the luminaire cables during assembly.  
Check the cable after every three turns when installing the suspension rods onto the luminaire.  
Relieve any twist in the cable by turning it anti-clockwise.

- 3. Attach the rod adapters (M) to the top of the suspension rods and install the canopy (D) on top.
- 4. Assemble and attach the rod adapters by installing the flat washer (E), followed by the spring washer and secure by tightening the nut (L).

**NOTE:** For the side with the earth connection, install the star washer, followed by the flat washer, earth cable, spring washer and secure by tightening the nut on top.

- 5. Install the “figure 8” cord restrainers (G) onto both the luminaire cables (S).
- 6. Install the luminaire cables (S) into the terminal block (F).
- 7. Use the mounting bracket (B) as a template to mark the screw hole positions on the ceiling.
- 8. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting washers (I), screws (C) and anchors (A). Check and ensure the washers (I), screws (C) and anchors (A) used are suitable for the mounting surface and the surrounding environment.
- 9. Connect the earth cable (K) from the mounting bracket (B) to the terminal block (F).
- 10. Connect the mains supply wires to the terminal block (F). Ensure the wires are secure and no bare wires are exposed.


Mains Supply Wire	Fitting Wire / Terminal block
Earth – Yellow/Green	Yellow/Green or 
Neutral – Blue or Black	Blue or N
Live – Brown or Red	Brown or L

**NOTE:** The luminaire is a Class I product and must be earthed during wiring and installation.  
Check the earth continuity after installation.

- 11. Install the canopy (D) onto the mounting bracket (B) and secure by tightening the decorative nuts (N).
- 12. Install globes (X – not included) into the lamp holders (W). Do not exceed the maximum wattage rating.
- 13. Install glass shades (Y – not included) onto the lamp holder assembly (U) and secure by tightening the nuts (V).

**NOTE:** This luminaire is only compatible with the following shades (sold separately):  
SKU# 039217, 039218, 039219, 039220 – Chrysler Round shade  
SKU# 039221, 039222, 039223, 039224 – Chrysler Schoolhouse shade  
SKU# 039225, 039226, 039227, 039228 – Chrysler Tier shade  
SKU# 039233, 039234, 039235, 039236 – Chrysler Ribbed shade  
SKU# 039264, 039265 – Chrysler Bottle shade  
SKU# 039266, 039267 – Chrysler Conical shade

- 14. After the full assembly and installation, switch on the luminaire to test and enjoy your new lighting product.

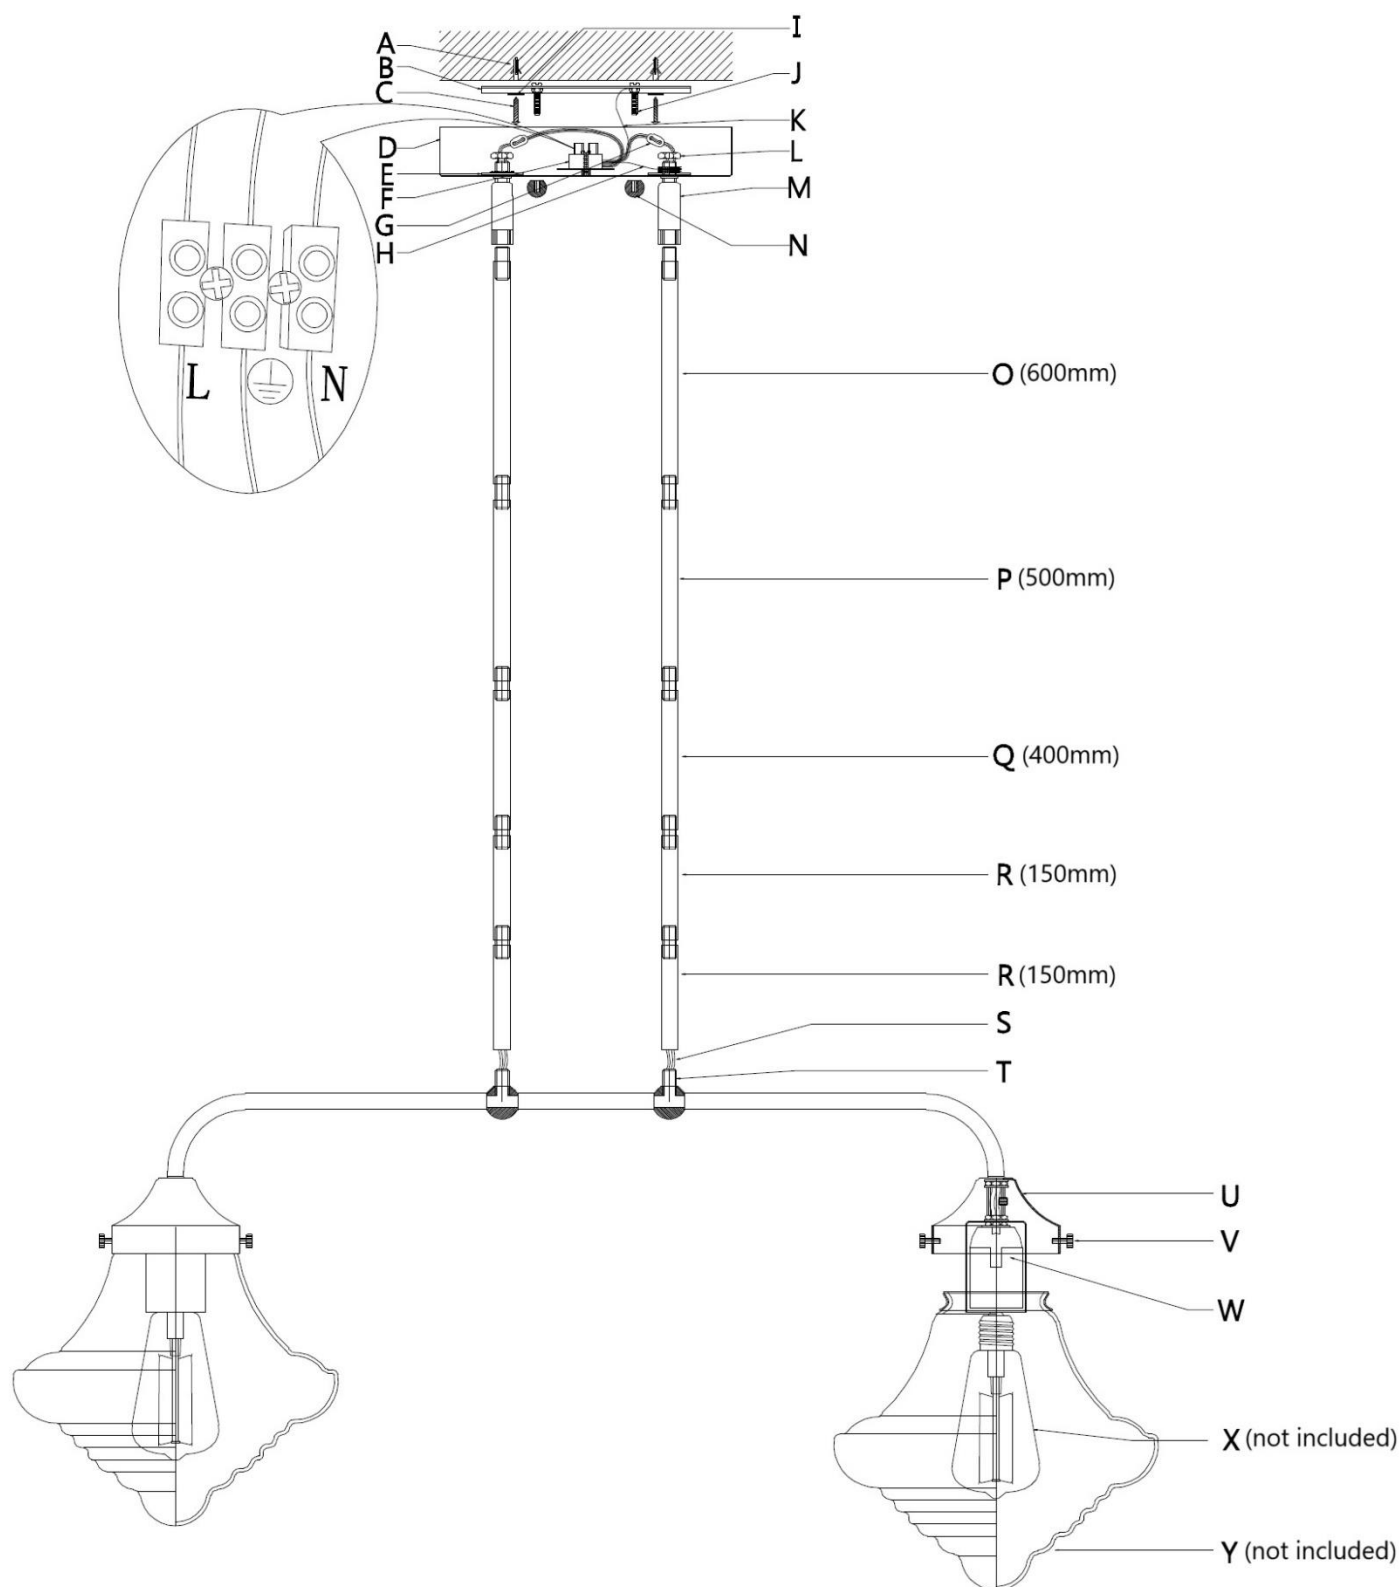

**NOTE:** This luminaire is only compatible with the following shades (sold separately):

**SKU# 039217, 039218, 039219, 039220 – Chrysler Round shade**


**SKU# 039221, 039222, 039223, 039224 – Chrysler Schoolhouse shade**

**SKU# 039225, 039226, 039227, 039228 – Chrysler Tier shade**

**SKU# 039233, 039234, 039235, 039236 – Chrysler Ribbed shade**

**SKU# 039264, 039265 – Chrysler Bottle shade**

**SKU# 039266, 039267 – Chrysler Conical shade**

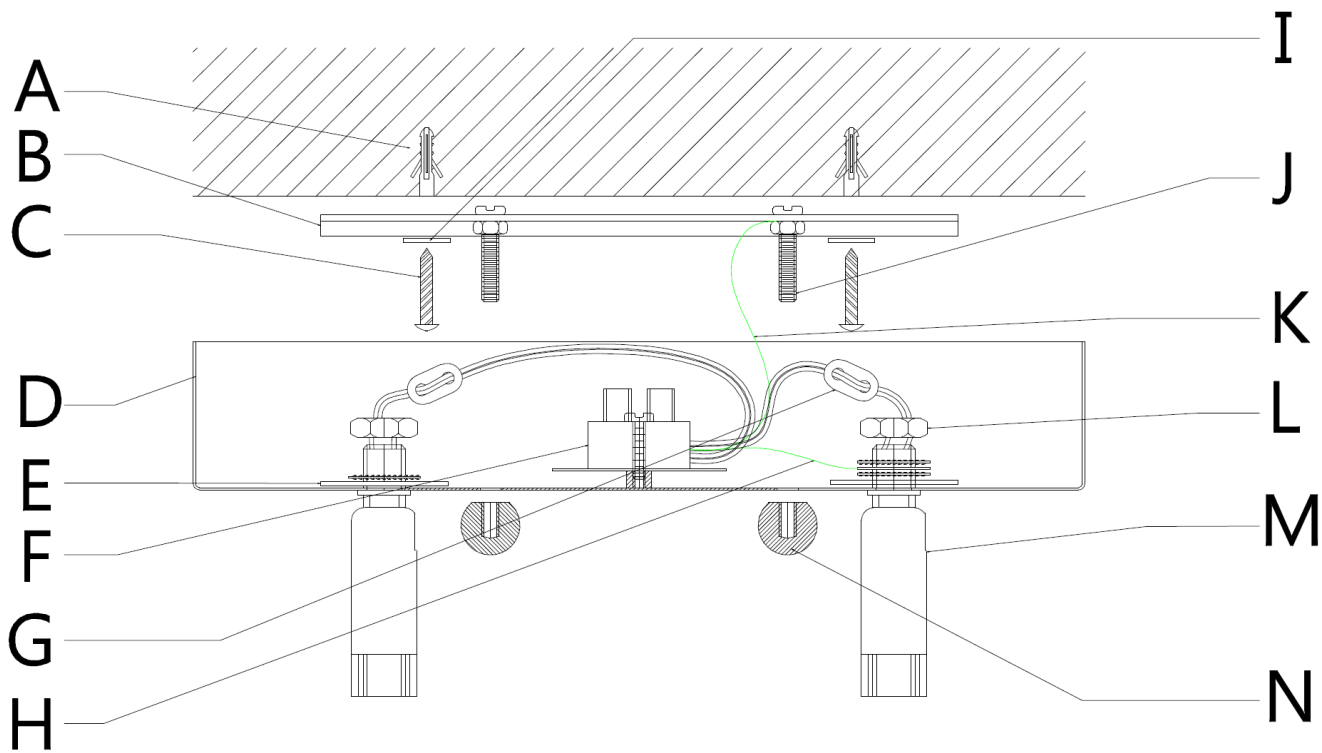

Safety tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting power.
- Select a suitable location away from liquids and hazards.
- To clean, wipe with a soft damp cloth. Do NOT soak or immerse the product in water or other liquids.
- Ensure that the fitting does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications

SKU #	039204	039205	039206	039207
Colour	Black	Antique Brass Finish	Antique Nickel Finish	Chrome
Rated Voltage	220-240V~ 50Hz			
Rated Wattage	90W Max. (2x Max. 45W)			
Lamp Holder	ES / E27			
Weight	1.8kg (without shades) 7.1kg (Max. weight with shades)			
Compatible Shades (sold separately)	SKU# 039217, 039218, 039219, 039220 – Chrysler Round shade SKU# 039221, 039222, 039223, 039224 – Chrysler Schoolhouse shade SKU# 039225, 039226, 039227, 039228 – Chrysler Tier shade SKU# 039233, 039234, 039235, 039236 – Chrysler Ribbed shade SKU# 039264, 039265 – Chrysler Bottle shade SKU# 039266, 039267 – Chrysler Conical shade			
Dimensions	L:680mm W:95mm H:158mm Suspension:1800mm Max.			