

Sculpt

SKU# 010995

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use. Please keep the instructions for future reference.

Warranty

- This light fitting is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If the fitting is not installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.
 eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- This is a Class I product and must be earthed.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation;
 - This product is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the fitting.
 - Ensure the fitting is not installed next to any air vents and is not in any moist or damp areas.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation directions


- 1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
- 2. Remove the mounting bracket (C) by loosening the screws (E) on both sides of the canopy.
- 3. Use the mounting bracket (C) as a template to mark the screw positions on the ceiling.
- 4. Install the mounting bracket (C) onto the ceiling by using appropriately sized mounting screws (D) and anchors (B). Ensure the screws (D) and anchors (B) used are suitable for the mounting surface.
- 5. To change the suspension length of the pendant, the cord length needs to be adjusted.
 - Loosen the cord anchorage (F) and adjust the cord to the desired length.
 - After reaching the desired suspension length, ensure the cord anchorage (F) is re-tightened.
- 6. Connect the mains supply wire to the terminal block (A). Ensure the wires are secure and no bare wires are exposed.

Mains Supply WireFitting WireEarth − Yellow/GreenYellow/Green ⊕Neutral − Blue or BlackBlueLive − Brown or RedBrown

- 7. Install the canopy onto the mounting bracket (C) by tightening the screws (E) on both sides.
- 8. Install a globe (G not included) into the lamp holder. Do not exceed the maximum wattage rating.

1|Page v1.1



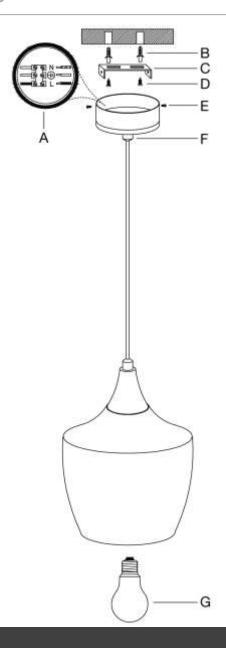

Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

Specifications	
SKU#	010995
Rated Voltage	220-240V~ 50Hz
Rated Wattage	MAX. 45W
Lamp Holder	ES / E27
Weight	2.5kg*
Dimensions	H:230mm Dia:200mm Susp:1800mm

*Note the weight of each fitting may vary ±10% due to the concrete material used.

2|Page v1.1