LUCCI
LEDlux

SURFACE
SKU# 170330, 170331, 170332, 170333, 170334, 170335, 170336, 170337, 170338
Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before using the product. Please keep instructions for future reference.

Warranty
- This light fitting is covered by a 3 year warranty. Please retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.

Installation requirements
- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.
  eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- This fitting is rated IP44. This must be maintained during installation.
- Replace any cracked protective lamp shade to maintain IP rating when using this fitting.
- Select a suitable location for installation;
  - This product is suitable for indoor and outdoor use.
  - Ensure the fitting is not installed next to any air vents and is not in any moist or damp areas.
  - The mounting point must support 2 times the weight of the fitting.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF.

Installation directions
1. Remove all packaging material from the fitting.
2. Remove the lamp base from the fitting by loosening the Allen key screws (5).
3. Use the lamp base as a template to mark the screw positions onto the ceiling. Drill holes into the ceiling and push plastic anchors into the holes.
4. Install the fitting onto the ceiling by using the mounting screws provided. Check and ensure that the anchors and mounting screws are suitable for the mounting surface.
5. Connect the mains supply wire to the terminal blocks (4). Ensure that the wires are secure and no bare wires are exposed.

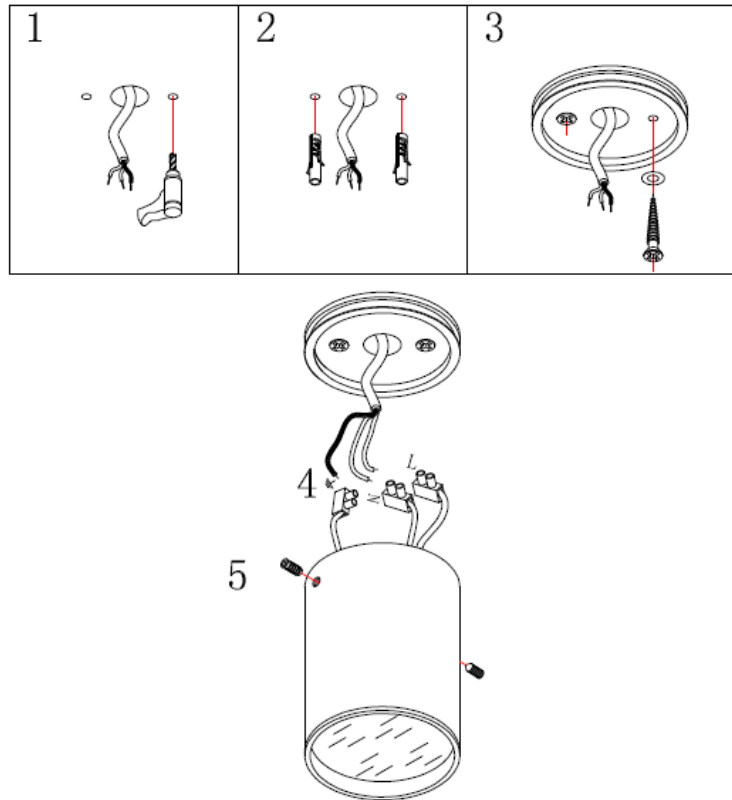| Mains Supply Wire		Fitting Wire
Earth – Yellow/Green	⏚	Yellow/Green
Neutral – Blue or Black		Blue
Live – Brown or Red		Brown

6. Install the lamp body onto the lamp base by securing the Allen key screws.

Safety tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning or adjustment to the fitting.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

Specifications

SKU #	170330,170333,170336	1170331,170334,170337	170332,170335,170338
Model #	LD-170330, LD-170333, LD-170336	LD-170331,LD-170334, LD-170337	LD-170332,LD-170335, LD-170338
Rated Voltage	220-240V~ 50Hz		
Rated Wattage	8W	11W	11W
LEDs	3000K, 400lm	3000K,600lm	3000K,600lm
Weight	0.41kg	0.55kg	0.59kg
Dimensions	H:80mm Dia:89mm	H:100mm Dia:89mm	H:150mm Dia:89mm
IP Rating	IP44	IP44	IP44